


## 20000 TECHNICAL DATA SHEET (electric diaphragm pump for airless painting)

Weight: 65 Kg



MODEL	20000
<b>Double head, to use also 2 colours at the same time</b>	
MAX VOL. FLOW	2x 7 l/min
MAX PRESSURE	250 bar
ENGINE	3 HP - electric
MOTOR OUTPUT	380 V - THREE PHASE
COUPLING ENGINE-PUMP	flanged, with elastic coupling

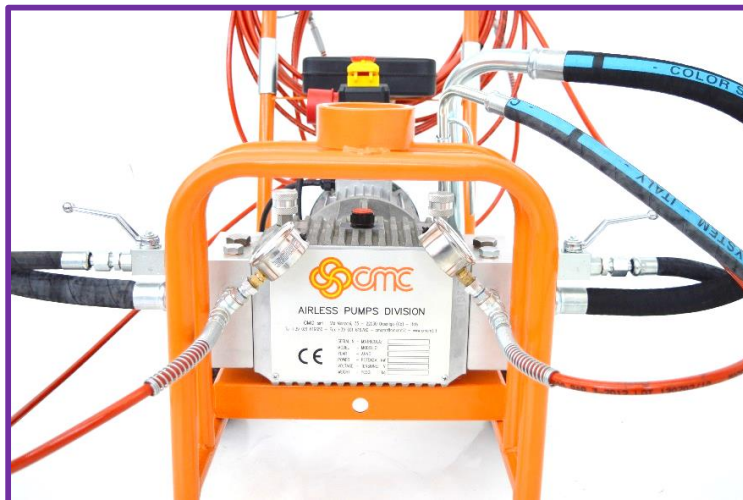

Photos don't show standard machine.

### SPRAYABLE PRODUCTS

acrylic paints, synthetic resin lacquers, 2K materials, emulsions, latex paints, release agents, priming varnishes and primers, fillers.

Attention: always verify that **materials** used are specifically **for airless application**

### AREAS OF APPLICATION:

**BUILDING & CONSTRUCTION:** painting, proofing

**WOOD & METAL TRATMENT:** structural steelworks, carpentries

**DOCKYARD:** shipbuilding, big tanks

### ACCESSORIES:

- Fitting with manometer
- Suction system: suction hose with mini filter, return hose and cock
- High pressure hose  $\frac{3}{4}$  l = 10 m
- Manual gun with 60 mesh filter (without nozzle and nozzle holder)
- Extension for manual gun
- Holder 11/16" for reversible nozzle
- Reversible nozzle

