

RMCD display OPUS B3 Eco Basic QT



Item number:

BPL-4001903

Created on 19.02.2024



Description

Type: TFT color graphic LCD with LED backlight

Size: 5, 108 mm (W) x 64.8 mm (H)

Resolution: 800 x 480 px (WVGA), 15:9

Colors: 16.7 million

Brightness: typ. 800 cd/m²

Contrast ratio: typ. 700:1

suitable for:

RMCD standard

RMCD-Advanced

RMCD-Professional

Spare parts



RMCD-Drive Cab Control Joystick

Item number: BPL-4000109

The RMCD-Drive Cab Joystick is the control unit for your RMCD solution



German plug, 3-pin, overmolded, IP67, 0.75mm²

Item number: BPL-4001901

2m-PUR / DT06-3S-A/K1/0.75/2m

for pressure sensor of RMCD - Road Marking Control Device



RMCD display OPUS B3 Eco Basic QT

Item number: BPL-4001903

Suitable for:
RMCD-Standard
RMCD-Advanced
RMCD-Professional



RMCD pressure sensor

Item number: BPL-4001945

Electronic pressure sensor; 0...250 bar; 0...3625 psi;
1/4" male thread
rAnalog signal; 4...20 mA


Spare parts

RMCD encoder



Item number: BPL-4001946

Dimension:
Diameter 36,5mm / L = 76mm
without pickup wheel

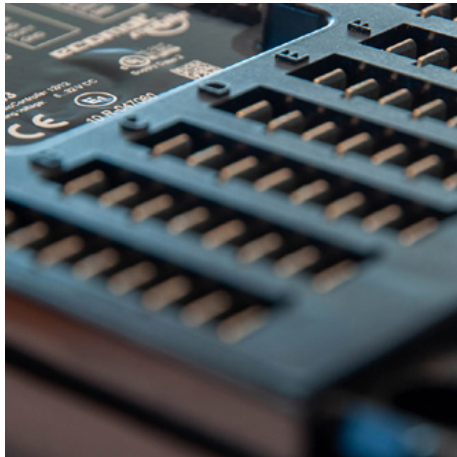

RMCD CAN bus

Item number: BPL-4001977

suitable for RMCD-Road-Marking-Control-Device



Y-cable KMM RMCD-Drive to RMCD-KeyPad

Item number: BPL-4002134

suitable for RMCD-Key-Pad - Professional



Housing with board and cable

Item number: BPL-A1005812

Incl. assembly of the board and cable set.
Cable for encoder included.

Cable for additional sensors, telematics module and actuators.

Spare parts



M12 cable socket angled 5m

Item number: BPL-B12090-CPS-002

5 meter 4pin CAN cable with 120 Ohm resistor

for encoder of the RMCD - Road Marking Control Device



RMCD keypad module 8 buttons - For entering markings

Item number: BPL-B12500


RMCD key pad - For RMCD Professional
For quick and easy selection of marking presets.
2 lines with 4 keys each
Numbered from 1 to 8



Antenna cable

Item number: PRO-136000198

assembled with black strands, 1mm², L=2m

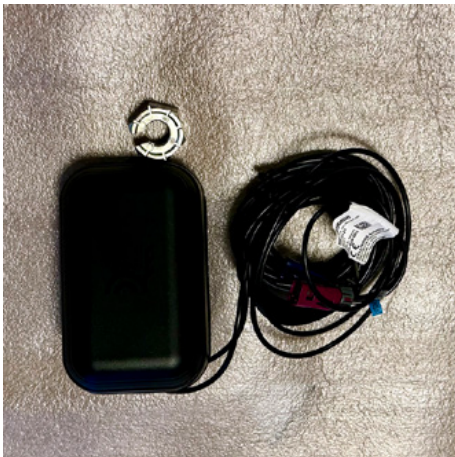

Antenna for telematics system

Item number: PRO-157000121

Mobile radio/GNSS combination roof antenna, flat-rectangular, roof mounting for screwing



CANlink mobile 3657 for telematics module

Item number: PRO-253004097

Wireless CAN interface for data exchange
via 2G/GSM/GPRS/EDGE, 3G/UMTS/HSPA and 4G/LTE Worldwide



Humidity and temperature meter

Item number: GAT-DZK300F13700-YY

DZK

Transmitter for pluggable probes



CT-SF22-C3 Miniature Pyrometer

Item number: MEP-4800103.003

suitable for RMCD - Advanced



RMCD-Advanced

Item number: RMCD-ADV

With the RMCD-Road Marking Control Device ADVANCED, we have developed a completely new system for operating road marking machines with greater convenience, based on the RMCD-CAN bus system. The variably configurable system offers a wide range of applications.



RMCD-Professional

Item number: RMCD-PRO

With the RMCD-Road Marking Control Device PROFESSIONAL, we have developed a completely new system for operating road marking machines with greater convenience, based on the RMCD-CAN bus system. The variably configurable system offers a wide range of applications.



RMCD standard

Item number: RMCD-STD

With the RMCD-Road Marking Control Device STANDARD, we have developed a completely new system for operating road marking machines with greater convenience, based on the RMCD-CAN bus system. The variably configurable system offers a wide range of applications.
