
U12 TECHNICAL DATA SHEET

(road marking machine configurable for airspray, airless, cold spray plastic 1:1, cold spray plastic 98:2; cold plastic high thickness)

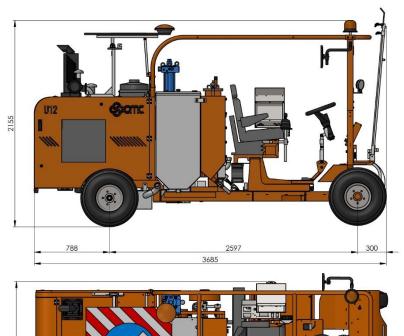

MODEL	U12
Dimensions	3685x1404x h2155 mm

STANDARD CONFIGURATION

TURBO diesel engine: 50 HP STAGE V

Hydraulic drive with DRUM BRAKES

Electronic spacing device

Warning board with arrow for left/right car overtaking and 2 flashing

Steering on front wheels

by hydraulic servo-assisted steering (brand ZF)
or
by hydraulic steering unit

it cliding (loft/right) up to above

Seats and console unit sliding (left/right) up to above marking unit position (only with hydraulic steering unit)

Steering-wheel with adjustable inclination

Sunshade roof

Images are not contractual.

TECHNOLOGY	CONFIGURATION
COLD PAINT - AIRSPRAY	1 pressurized tank for paint 400 l 1 pressurized tank for glass beads 180 l (max pressure 0,5 bar) Piston air compressor 1390 l/min
COLD PAINT - AIRLESS	1 tank for paint 400 l 1 pressurized tank for glass beads 200 l (max pressure 0,5 bar) Piston air compressor 827 l/min
COLD SPRAY PLASTIC – AIRLESS RATIO 1:1	2 tanks for plastic 200 l (2x) 1 pressurized tank for glass beads 200 l (max pressure 0,5 bar) Piston air compressor 827 l/min
COLD SPRAY PLASTIC – AIRLESS RATIO 98:2 EXTERNAL MIXING (ONLINE)	1 tank for plastic 400 l 1 pressurized tank for glass beads 200 l (max pressure 0,5 bar) Piston air compressor 827 l/min
COLD PLASTIC HIGH THICKNESS – SHOE SYSTEM	1 pressurized tank for plastic 400 l 1 pressurized tank for glass beads 180 l (max pressure 0,5 bar) Piston air compressor 827 l/min



Control for forward, reverse and neutral gear with engagement of NEGATIVE BRAKES

Led beacon

Sunshade roof

Airless piston pump, airless configuration Warning board with arrow for left/right car overtaking and 2 flashing



Seats and console unit **sliding** (left/right) up to above marking unit *only with hydraulic steering*



Electronic spacing device

Steering-wheel with adjustable inclination

Light

Steering on front wheels



